DOCUMENT:	PRODUCT SPECIFICATIONS	DOOR APPLICATION:	SINGLE, BI-PARTING, BYPASSING	DRAWING SCALE:	3/4" = 1'-0" (1:3)	KROWNLAB 2351 NW York St.
SYSTEM:	INGER DOOR PULL	PANEL THICKNESS:	SEE TABLE BELOW	UNITS:	INCHES	Portland, OR 97210 +1 503 292 6998 K
MOUNTING STYL	E: WOOD AND GLASS*	MAXIMUM WEIGHT:	N/A	DATE:	2/22/2022	www.krownlab.com support@krownlab.com




## DOOR PANEL THICKNESS RANGE

WOOD	GLASS*		
1-3/8" & UP	3/8" TO 1/2"		

CONTACT US FOR PANELS OUTSIDE OF THIS RANGE

<sup>\* =</sup> SEE GLASS SPECIFICATIONS PAGE FOR MORE INFORMATION

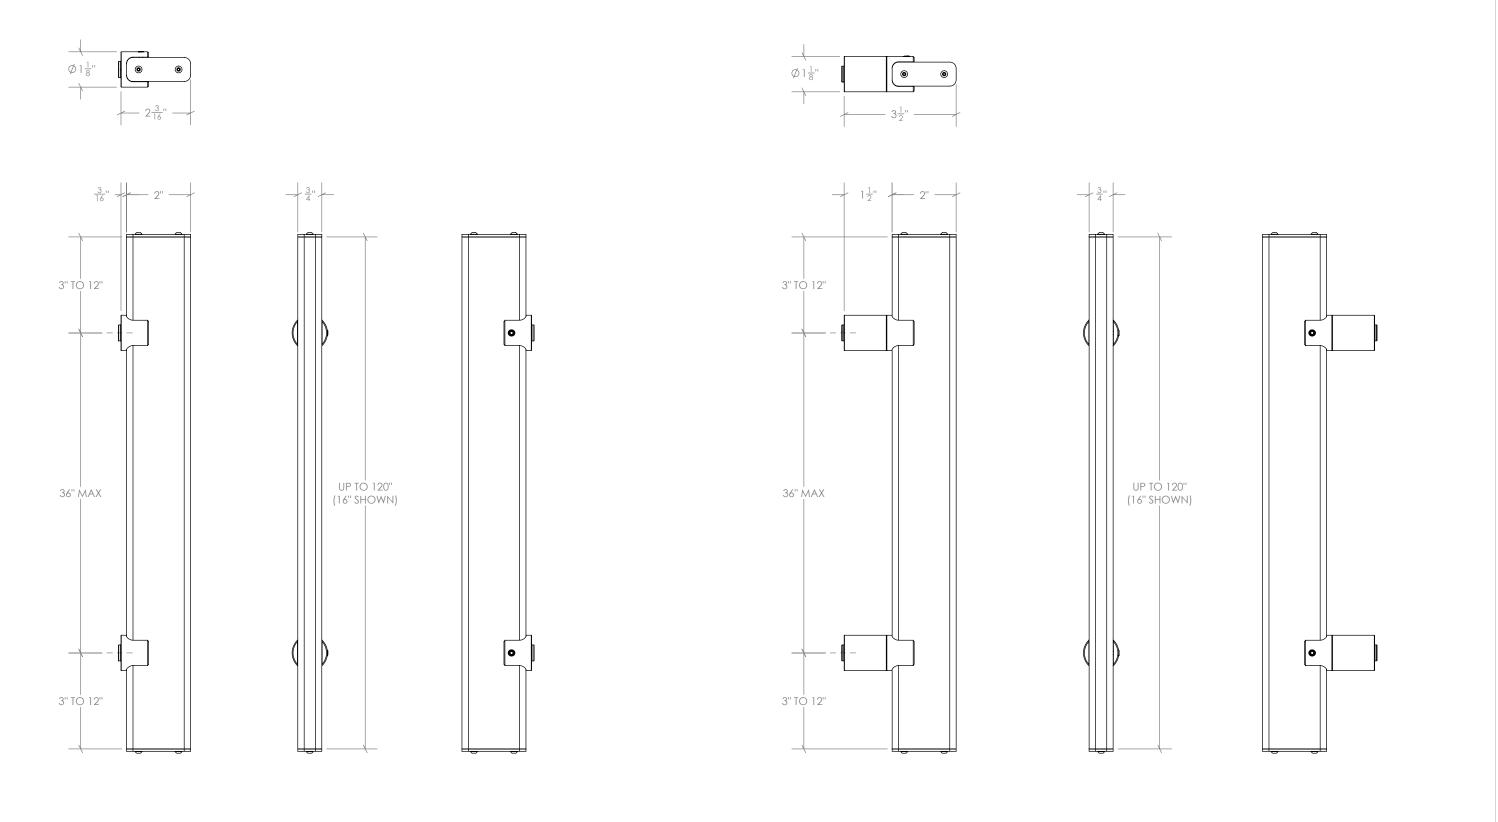

DOCUMENT:	PRODUCT SPECIFICATIONS	DOOR APPLICATION:	SINGLE, BI-PARTING, BYPASSING		AWING SCALE: 3/4" = 1'-0" (1:12)		KROWNLAB 2351 NW York St. Portland, OR 97210 +1 503 292 6998  KROWNLAB
SYSTEM:	INGER DOOR PULL	PANEL THICKNESS:	INGER PULL CONFIGURATION DEPENDENT	UNI	IIVCI IES		+1 503 292 6998 KROWNLAI
MOUNTING STYLE:	WOOD & GLASS (SEE GLASS SPECIFICATIONS PAGE FOR MORE INFORMATION)	MAXIMUM WEIGHT:	N/A	DAT	<sup>E:</sup> 2/22/2022		www.krownlab.com PDX - ORE support@krownlab.com
DOOR MOI > CTC IS N > END OF	UNTING POINT CTC LOCATIONS MUST SATISFY THE FOLLOWING REQUIREMENTS: O GREATER THAN 36" DOOR PULL EXTENDS 3" TO 10" BEYOND END MOUNTING POINT						
	16" PULL 24" PULL		2 MOL	56" PULL X LENGTH FOR JNTING POINTS)	92" PULL (MAX LENGTH FOR 3 MOUNTING POINTS)	120" f (MAX LE	PULL NGTH)
						Q	

Portland OP 07010	OCUMENT:	PRODUCT SPECIFICATIONS	DOOR APPLICATION: SINGLE, BI-PARTING,	BYPASSING	DRAWING SCALE: 3/4" = 1'-0" (1:2)	KROWNLAB 2351 NW York St.
BYALTED HUP MICH. RED RIVED I SCHOL RED RIVED I	rstem:	INGER DOOR PULL	PANEL THICKNESS: INGER PULL CONFIG	URATION DEPENDENT	UNITS: INCHES	Portland, OR 97210 +1 503 292 6998 KROWNLA
	OUNTING STYLE:	WOOD	MAXIMUM WEIGHT: N/A		DATE: 2/22/2022	www.krownlab.com PDX - ORE support@krownlab.com
		SINGLE SIDED - FLUSH	SINGLE SIDED - STANDOFF	DOUBLE SIDED - FLUSH	DOUBL	.e. sided - standoff