


# Fabrication Drawing for Bypass with Center Mount | Oden Top Mount (Customer Name) - CLOSED I

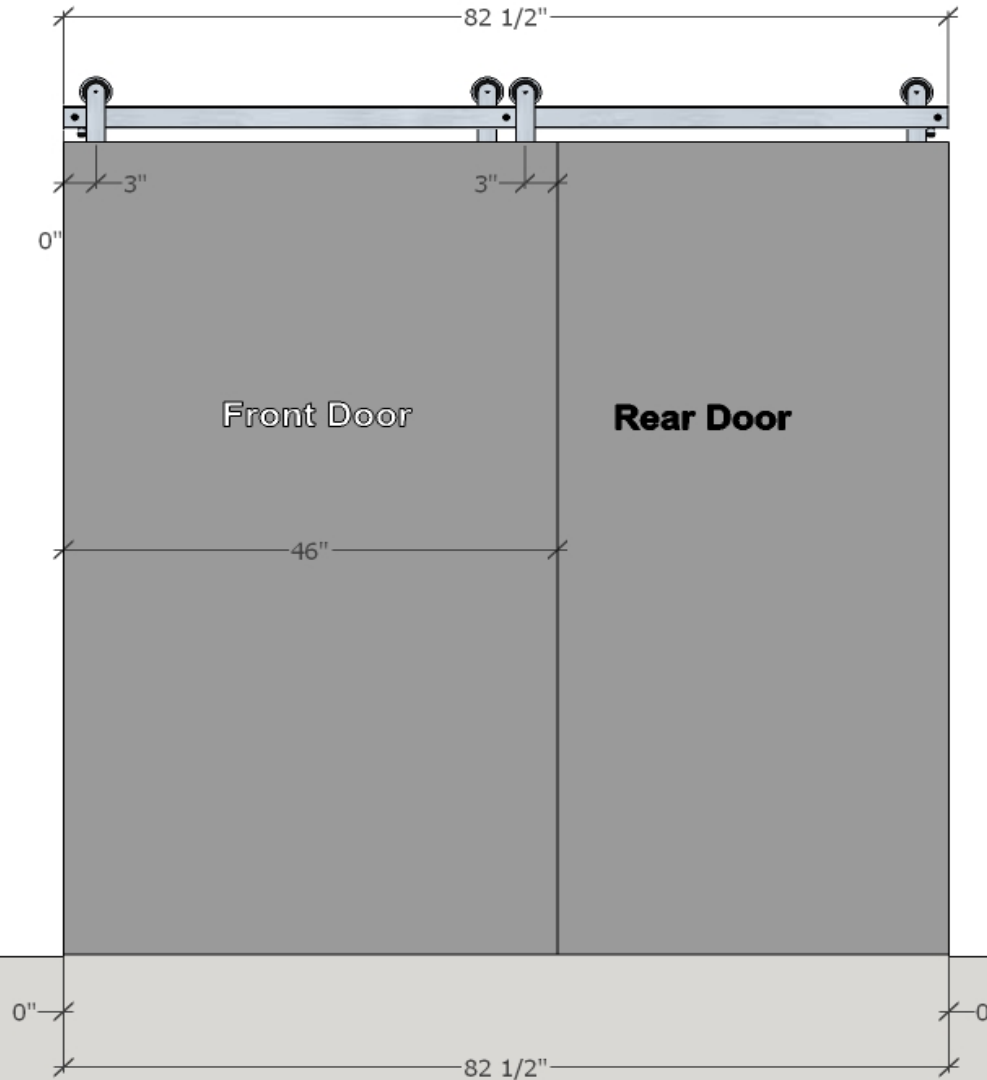


Sales Order #:  
P.O. #:  
Date:  
Drawn by:

Hole Spec: Track to Wall attachment holes to be 9/16" in diameter (shown open).

Track to Track attachment holes to be 1/2" in diameter (shown filled in).

Track#	Qty.	Length	Finish	Panel weight	Panel depth
Rear	2	82-1/2"	Brushed	<225 lbs.	
Front	2	82-1/2"	Stainless	<225 lbs.	

# Fabrication Drawing for Bypass with Center Mount | Oden Top Mount (Customer Name) - CLOSED 2

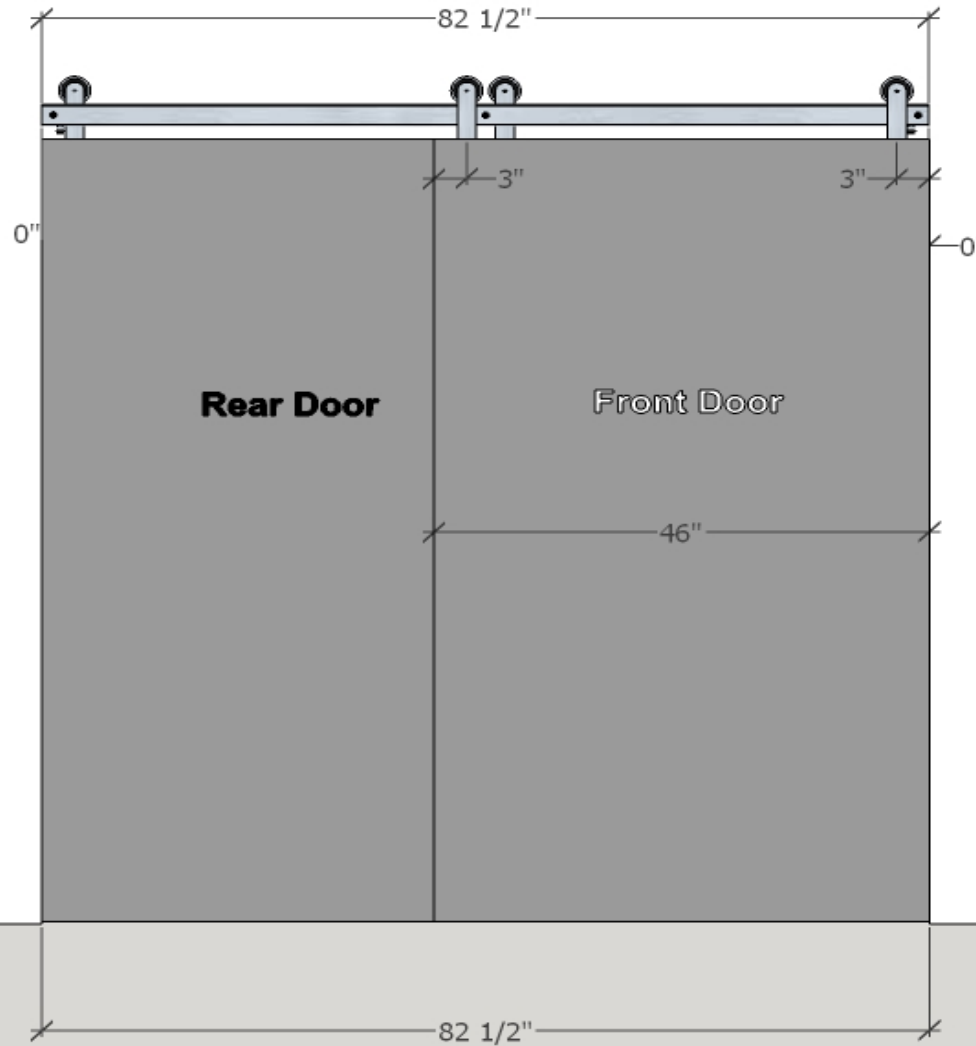


Sales Order #:  
P.O. #:  
  
Date:  
  
Drawn by:

Hole Spec: Track to Wall attachment holes to be 9/16" in diameter (shown open).

Track to Track attachment holes to be 1/2" in diameter (shown filled in).

Track#	Qty.	Length	Finish	Panel weight	Panel depth
Rear	2	82-1/2"	Brushed	<225 lbs.	
Front	2	82-1/2"	Stainless	<225 lbs.	

# Fabrication Drawing for Bypass with Center Mount | Oden Top Mount (Customer Name) - LEFT OPEN

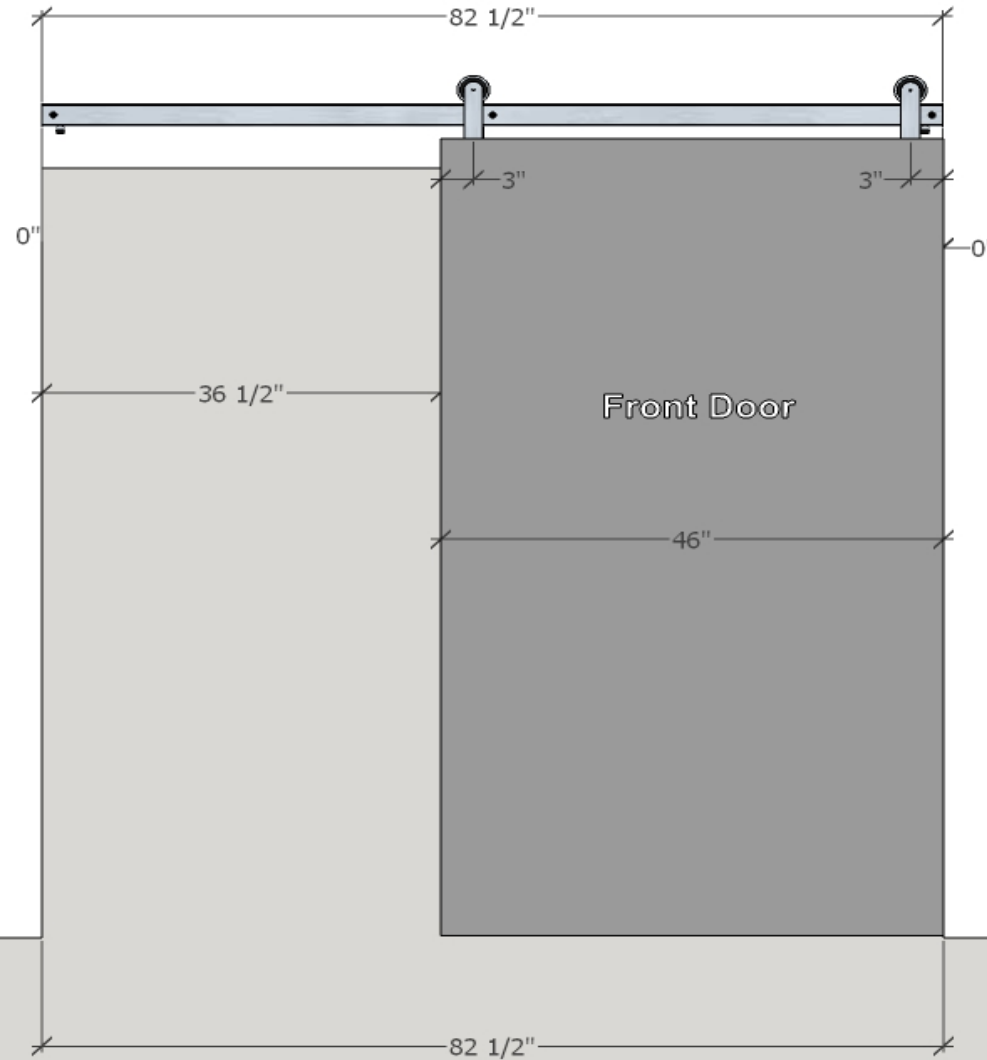


Sales Order #:  
P.O. #:  
  
Date:  
  
Drawn by:

Hole Spec: Track to Wall attachment holes to be 9/16" in diameter (shown open).  
  
Track to Track attachment holes to be 1/2" in diameter (shown filled in).

Track#	Qty.	Length	Finish	Panel weight	Panel depth
Rear	2	82-1/2"	Brushed	<225 lbs.	
Front	2	82-1/2"	Stainless	<225 lbs.	

# Fabrication Drawing for Bypass with Center Mount | Oden Top Mount (Customer Name) - RIGHT OPEN

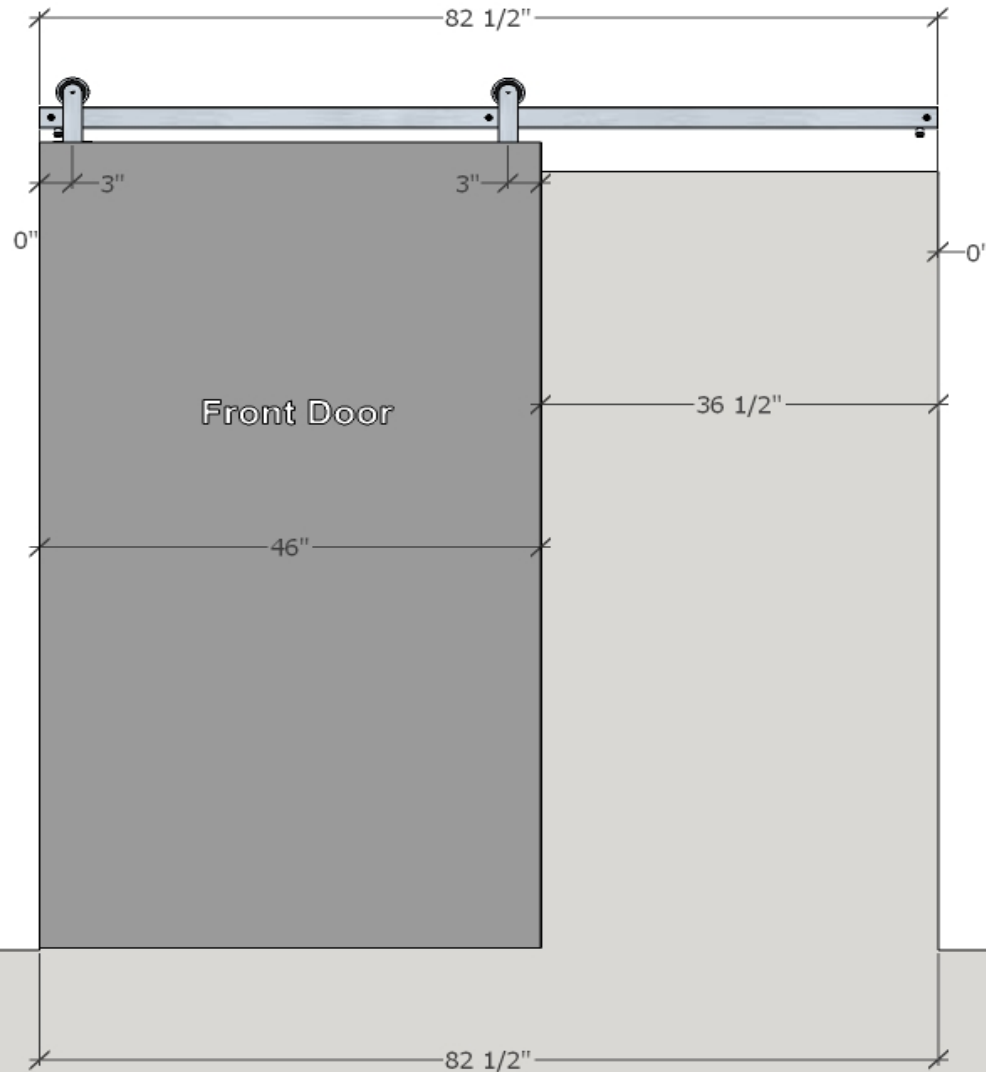

Sales Order #:  
P.O. #:

Date:

Drawn by:

Hole Spec: Track to Wall attachment holes to be 9/16" in diameter (shown open).

Track to Track attachment holes to be 1/2" in diameter (shown filled in).

Track#	Qty.	Length	Finish	Panel weight	Panel depth
Rear	2	82-1/2"	Brushed	<225 lbs.	
Front	2	82-1/2"	Stainless	<225 lbs.	


Fabrication Drawing for 59" Wide Shower | Rorik Alcove  
(Customer Name) - CLOSED 3D



Sales Order #:  
P.O. #:  
  
Date:  
  
Drawn by:

<u>Track#</u>	<u>Qty.</u>	<u>Length</u>	<u>Finish</u>	<u>Panel weight</u>	<u>Panel depth</u>
1	1	59"	Brushed Stainless	<200 lbs *	


# Fabrication Drawing for 59" Wide Shower | Rorik Alcove (Customer Name) – OPEN 3D

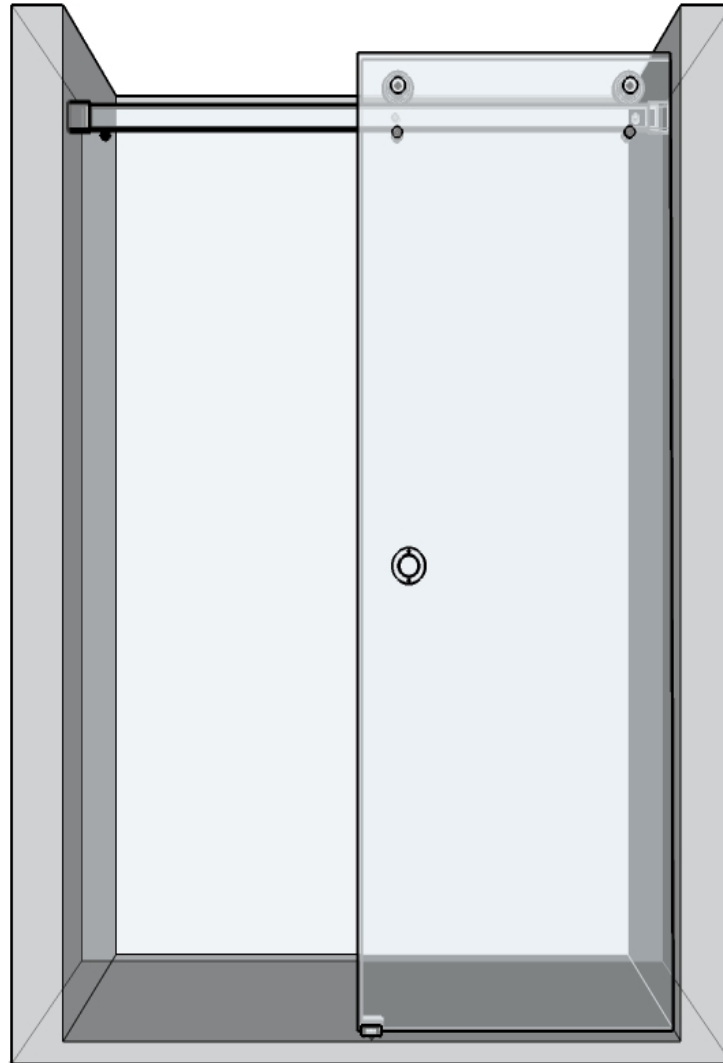

Sales Order #:  
P.O. #:  
  
Date:  
  
Drawn by:

<u>Track#</u>	<u>Qty.</u>	<u>Length</u>	<u>Finish</u>	<u>Panel weight</u>	<u>Panel depth</u>
1	1	59"	Brushed Stainless	<200 lbs *	

# Fabrication Drawing for 59" Wide Shower | Rorik Alcove (Customer Name) - DIMENSIONS

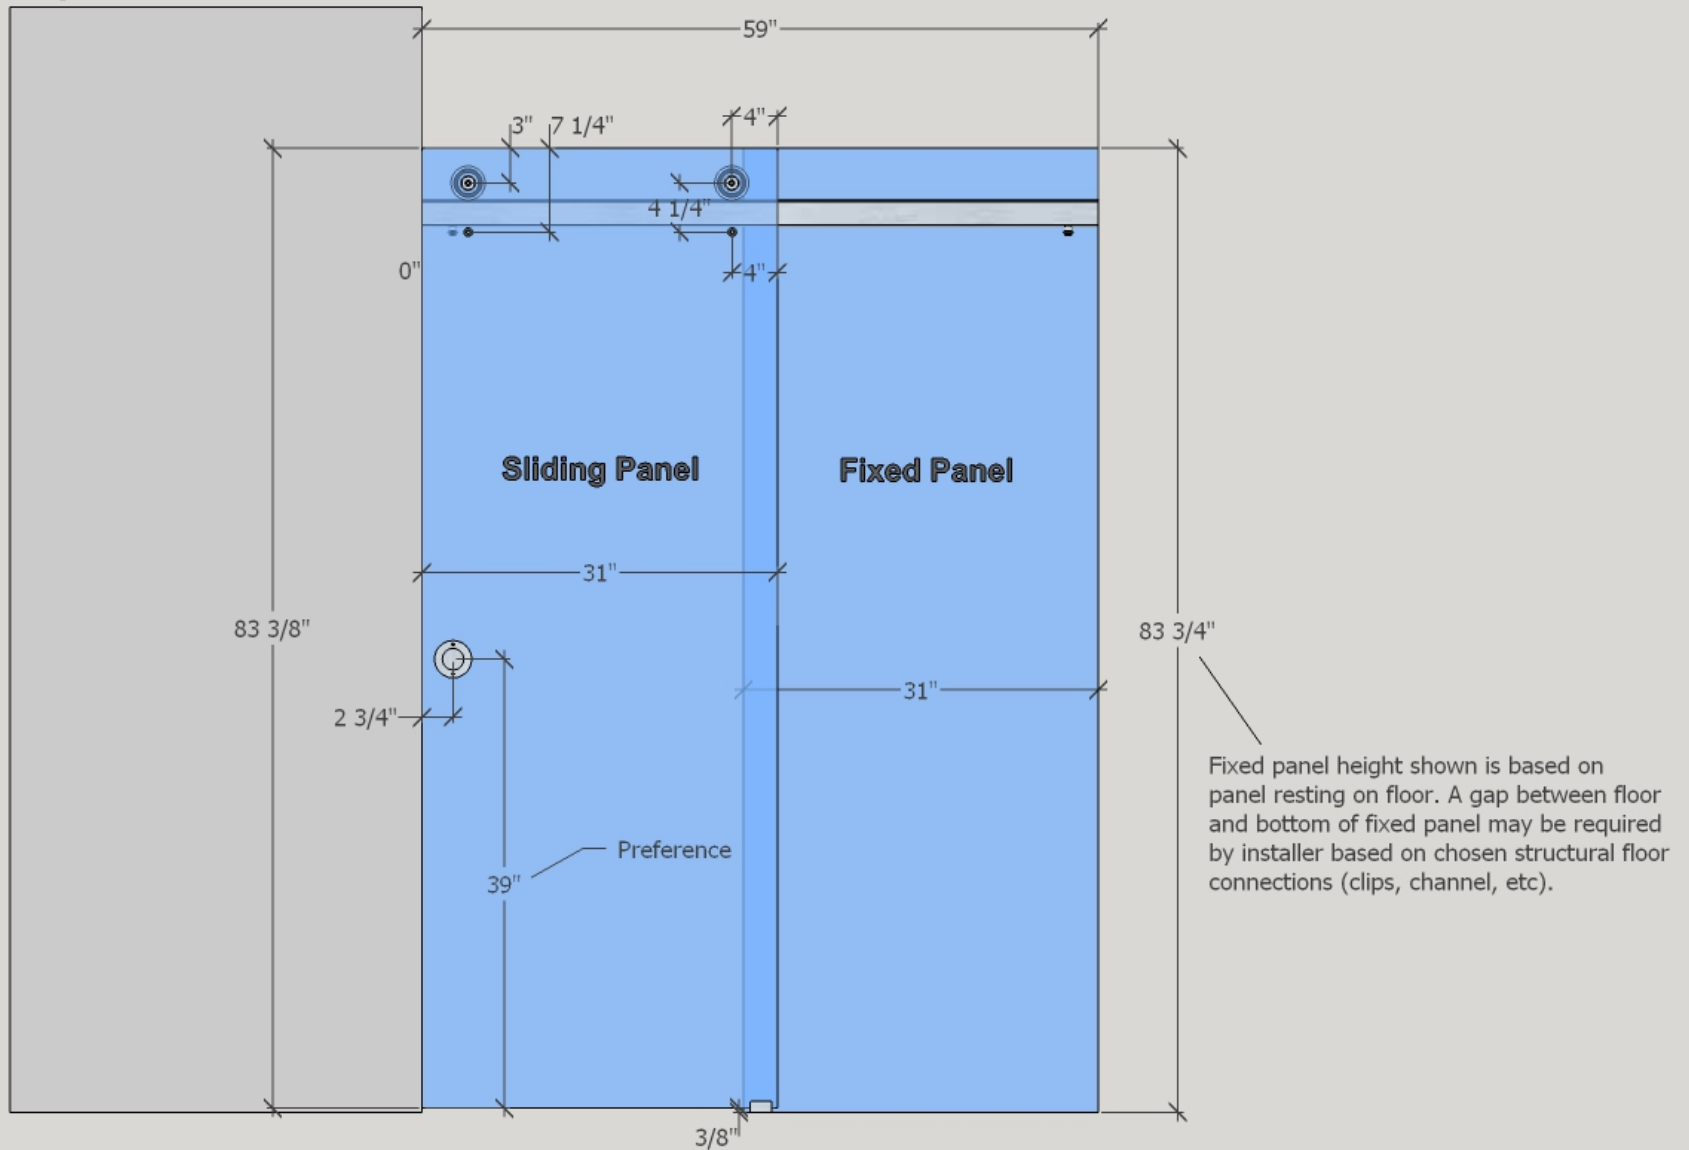


Sales Order #:  
P.O. #:

Date:

Drawn by:

Track#	Qty.	Length	Finish	Panel weight	Panel depth
1	1	59"	Brushed Stainless	<200 lbs *	

# Fabrication Drawing for 59" Wide Shower | Rorik Alcove (Customer Name) – HOLE PATTERN DETAIL

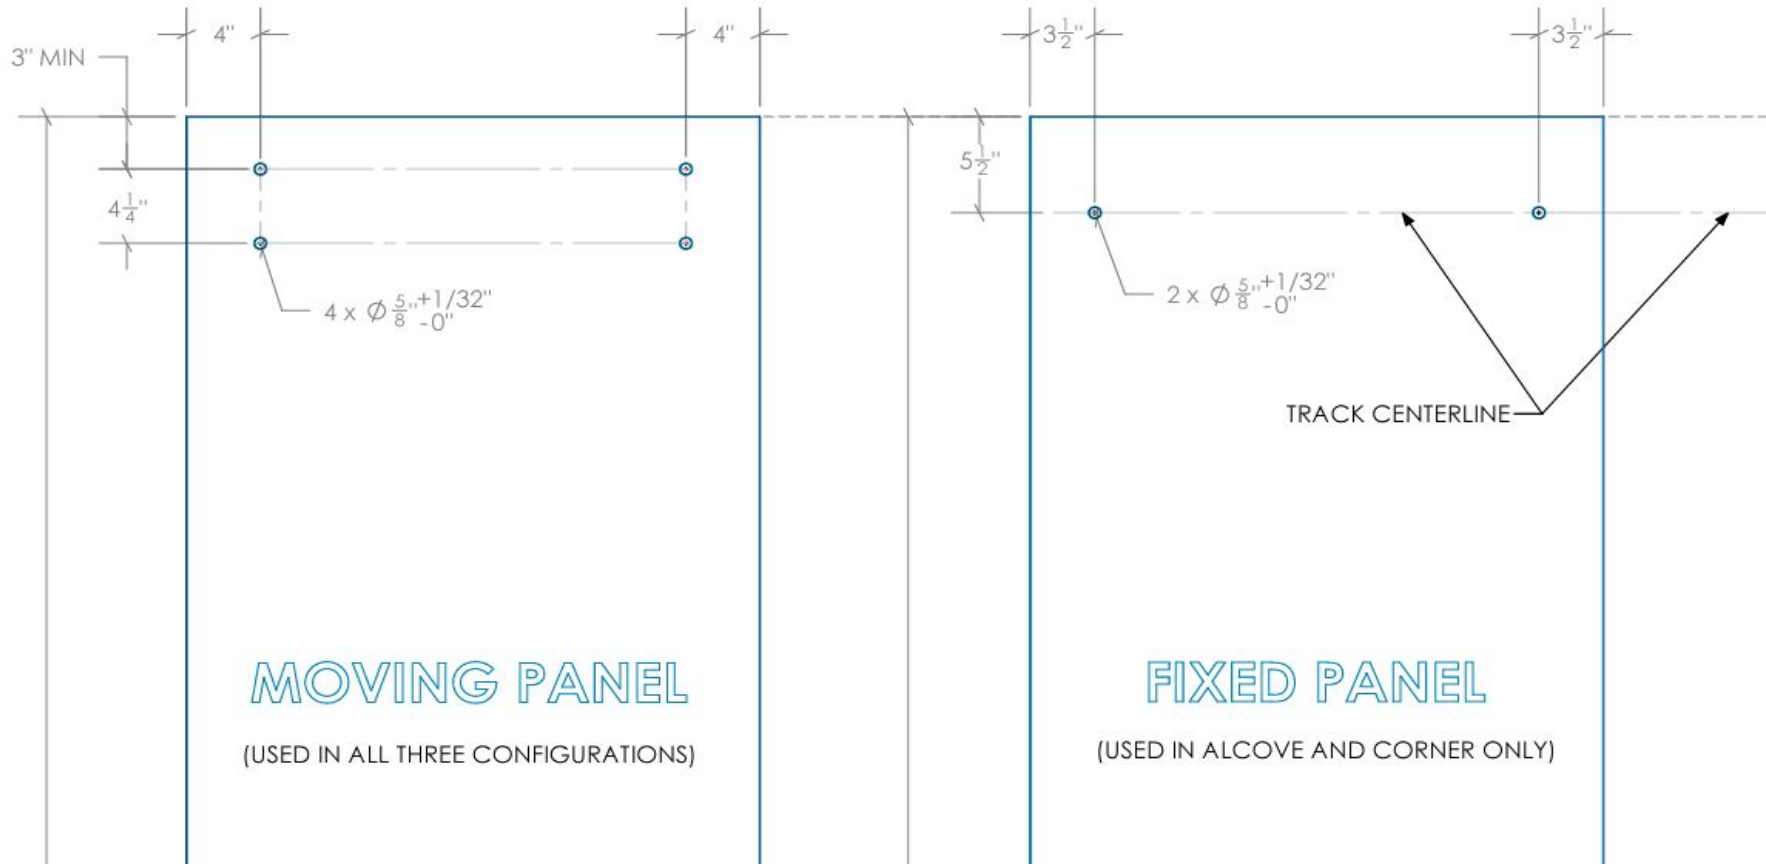

Glass panels must be flat polished and have a 1MM chamfer on all edges.

All holes must be drilled or CNC machined with straight walls and seamed edges. Do not water-jet. No tapered holes.


All tempered glass is subject to experience spontaneous breakage. It is the buyers responsibility to determine and approve glass specification(s) suitable to meet all factors relevant to their particular application in conjunction with all Krown Lab, Inc.'s products.

Sales Order #:  
P.O. #:  
  
Date:  
  
Drawn by:

Track#	Qty.	Length	Finish	Panel weight	Panel depth
1	1	59"	Brushed Stainless	<200 lbs *	



# Fabrication Drawing for 59" Wide Shower | Rorik Alcove (Customer Name) – EBBA PULL DETAIL

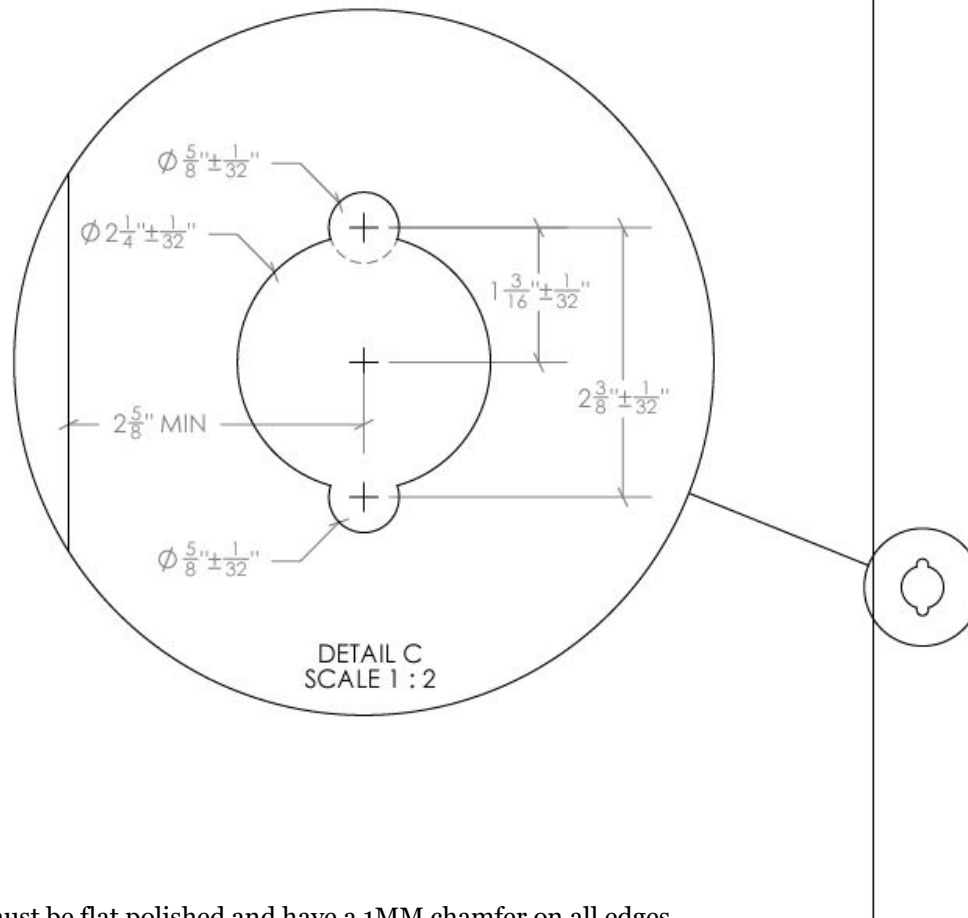

Glass panels must be flat polished and have a 1MM chamfer on all edges.

All holes must be drilled or CNC machined with straight walls and seamed edges. Do not water-jet. No tapered holes.

All tempered glass is subject to experience spontaneous breakage. It is the buyers responsibility to determine and approve glass specification(s) suitable to meet all factors relevant to their particular application in conjunction with all Krown Lab, Inc.'s products.

Sales Order #:
P.O. #:
Date:
Drawn by:

Track#	Qty.	Length	Finish	Panel weight	Panel depth
1	1	59"	Brushed Stainless	<200 lbs *	